

## BDT screen changers

OPTIMIZED
PERFORMANCE,
MAXIMUM
CONVENIENCE

FILTER MASSES
45 - 120 mm

## **APPLICATIONS**

- Blown or cast films
- Flat sheet
- Pipes and profiles
- Cable coating
- Masterbatch and compound pelletizing
- Blow and injection moulding




Compact and reliable, the BDT hydraulic screen changers enhance production performance by eliminating any manual effort from the operator, thanks to activation via a hydraulic swinging cylinder.

Their **compact** and **robust** design makes them easy to integrate into small and medium-sized extrusion and co-extrusion lines where space is extremely limited.

Available with filtering sizes from Ø 45 to Ø 120 mm, they are equipped with a self-activating sealing system that ensures safe, leak-free operation at working pressures of up to 800 bars.

The movement of the filter plate is carried out with precision through hydraulic actuation.

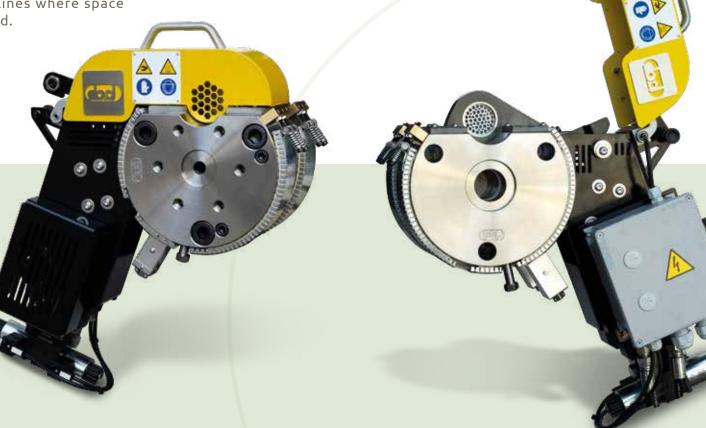

SMART, LEAK-FREE EXTRUSION EFFICIENCY