

Hydraulic screen changers

BDT screen changers

**OPTIMIZED
PERFORMANCE,
MAXIMUM
CONVENIENCE**

FILTER MASSES
45 - 120 mm

APPLICATIONS

- Blown or cast films
- Flat sheet
- Pipes and profiles
- Cable coating
- Masterbatch
and compound pelletizing
- Blow and injection moulding




Compact and reliable, the **BDT hydraulic screen changers** enhance production performance by **eliminating any manual effort from the operator**, thanks to activation via a **hydraulic swinging cylinder**.

Their **compact** and **robust** design makes them easy to integrate into small and medium-sized extrusion and co-extrusion lines where space is extremely limited.

Available with filtering sizes from **Ø 45 to Ø 120 mm**, they are equipped with a self-activating sealing system that ensures safe, leak-free operation at working pressures of up to **800 bars**.

The movement of the filter plate is carried out with precision through hydraulic actuation.

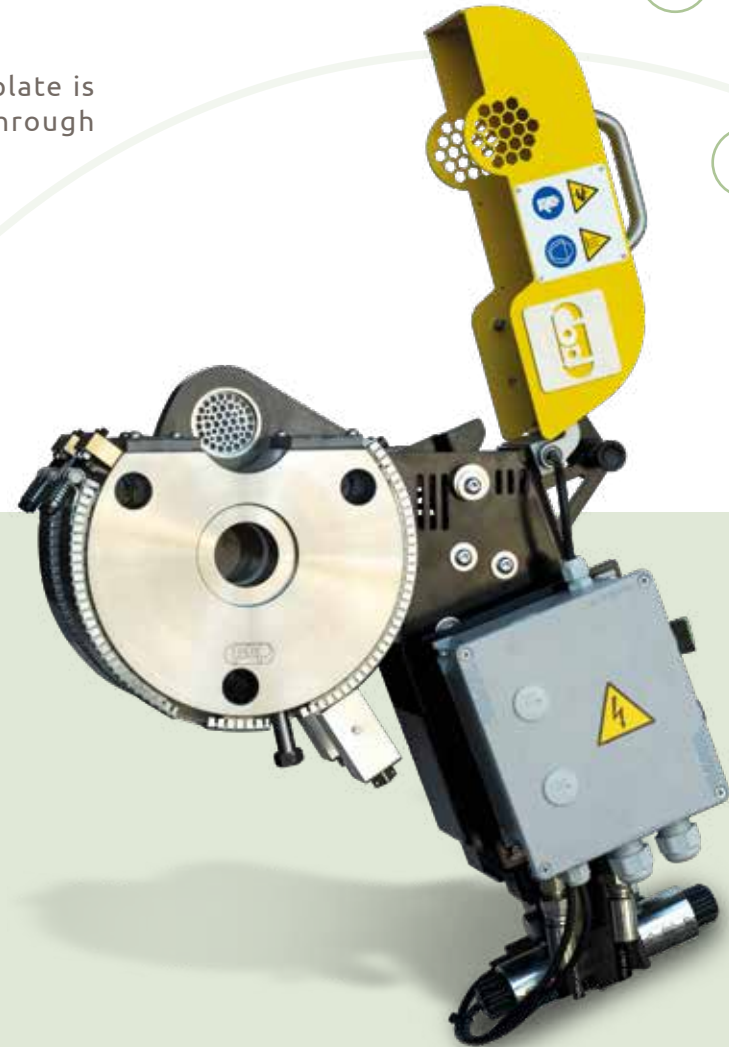

SMART, LEAK-FREE
EXTRUSION EFFICIENCY